
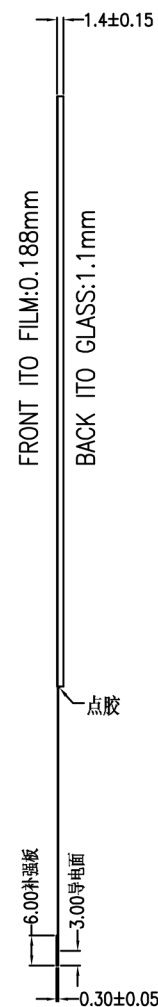


PIN	LOGIC
1	LEFT
2	BOTTOM
3	RIGHT
4	UPPER



说明：

1. 结构 :film+glass+FPC
film:雾面防牛防刮 $\sim 0.188\text{mm}$
glass: $500\ \Omega/\square$ (1.1mm)
tail:FPC (pitch=1.0mm)
总厚度 : $1.4\pm 0.15\text{mm}$
2. 工作电压 :5.0V
3. 电路等级 :DC5V 1mA
4. 绝缘阻抗 : $\geq 20\text{M}\Omega$ (25V DC)
5. 线性 : $\leq 2.0\%$
6. 透光率 : $\geq 78\%$
7. 操作压力 :20-150g
8. 使用寿命 : $\geq 1,000,000$ 次
9. 工作环境 : $-20^{\circ}\text{C}\sim +70^{\circ}\text{C}$ ' $\leq 90\text{RH}$
10. 储存环境 : $-30^{\circ}\text{C}\sim +80^{\circ}\text{C}$ ' $\leq 90\text{RH}$
11. 未注尺寸公差按 ± 0.20

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES MILLIMETERS TOLERANCES: ANGLES $\pm 1^{\circ}$ $.XX^{\circ} \pm .02^{\circ}$ $.XXX^{\circ} \pm .005^{\circ}$ OR 0.Xmm ± 0.5 mm 0.XXmm ± 0.13 mm	http://www.bvslcd.cn			
Tel:0755-23059953				
DRAWN BY: YING	DATE: 09-07-27	DRAWING NO.:		REV
CHECKED BY:	DATE:			A
APPROVED BY:	DATE:	TITLE:	SHEET NO.: 1 OF 1	