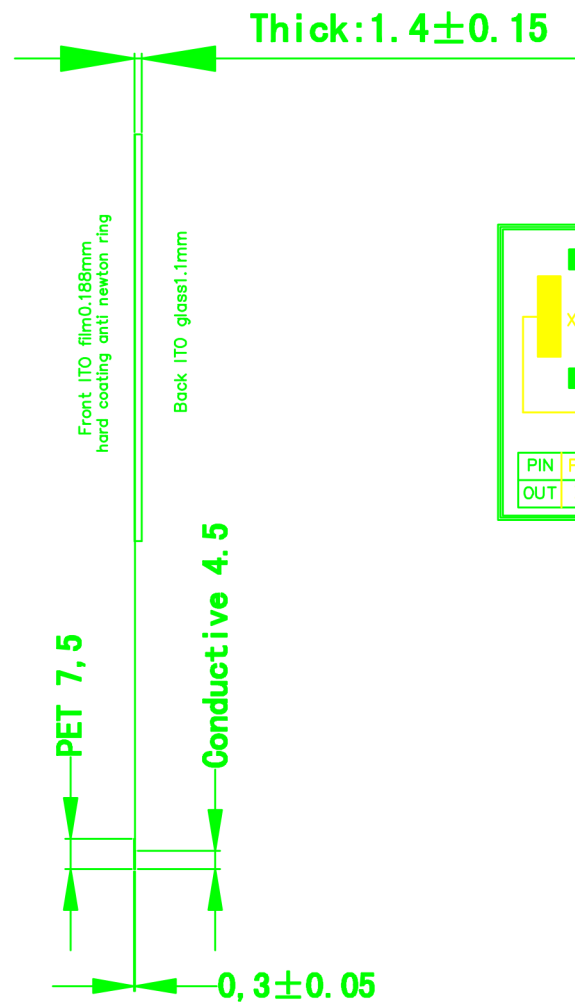
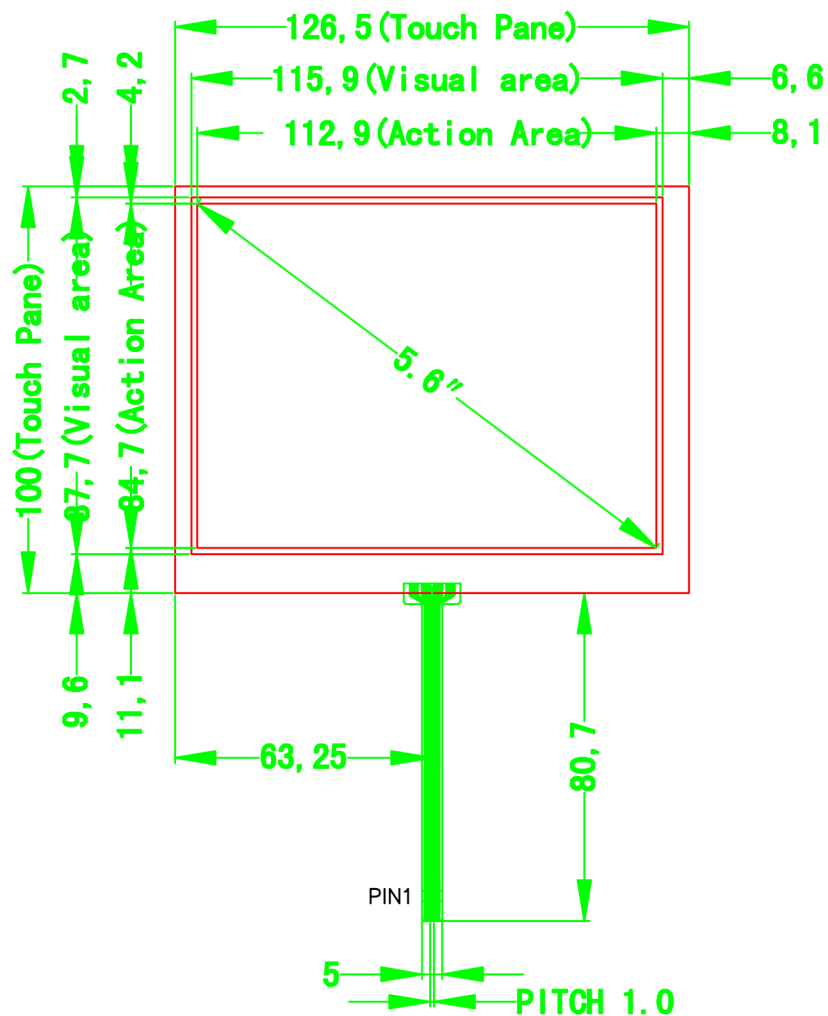


Instruction:

- 1.Type: Film to Glass
- 2.Operating Voltage: $\leq 10V$
- 3.Response Time: $\leq 10ms$
- 4.Storage Temperature: $-20^{\circ}C \sim +70^{\circ}C$
- 5.Operation Temperature/Humidity: $-10^{\circ}C \sim +60^{\circ}C$ / 20%~95%
- 6.Hitting Life: >1,000,000 Times, 250gf Force;
- 7.writing Life >100,000 Times 250gf Force;
- 8.Connect Material: FPC

- 9.Film Thickness: 0.188mm
- 10.Glass Thickness: 1.1mm
- 11.Light transmission: $\geq 78\%$
- 12.Force: 100g or more
- 13.Linearity: $\leq 1.5\%$
- 14.Insulation: $\geq 20M \Omega$
- 15.Resistance: X: $410 \Omega \sim 750 \Omega$;
Y: $220 \Omega \sim 410 \Omega$.
- 16.Surface Hardness $\geq 3H$ (pencil)