Version	MARK	MODIFY	DATE

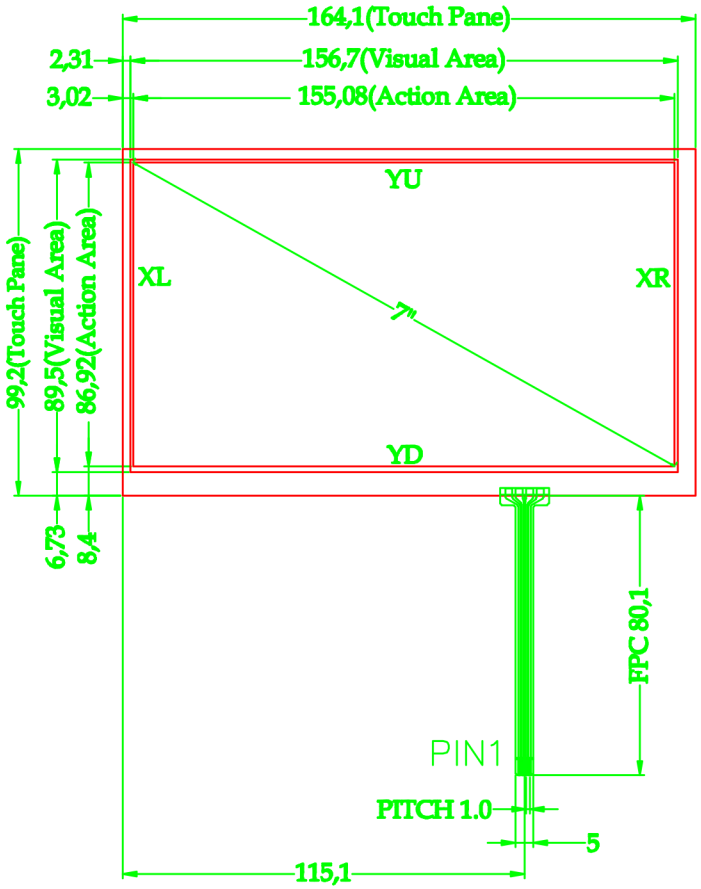

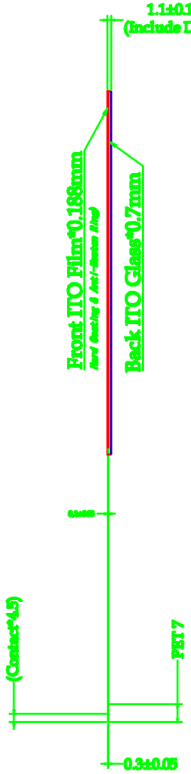

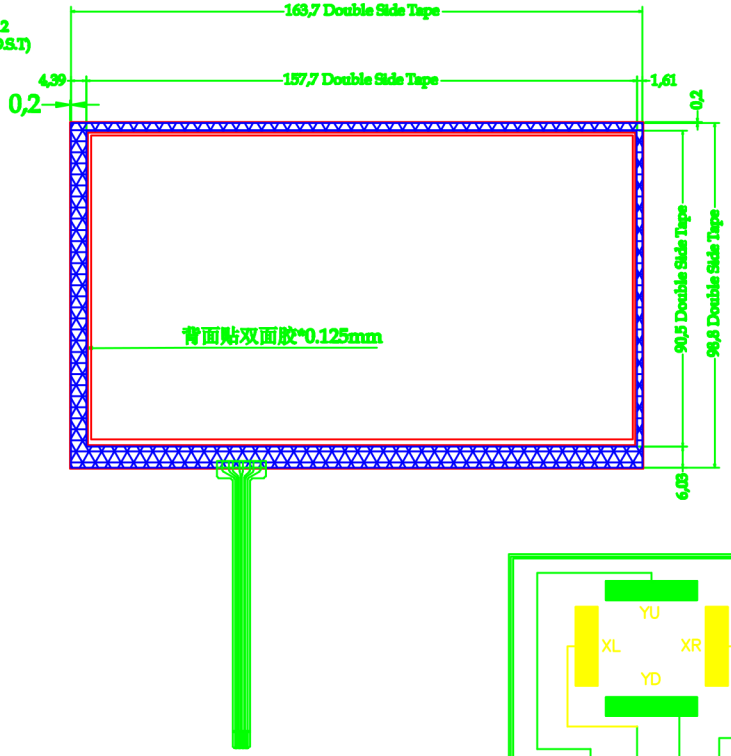



Instruction:
1.Type: Film to Glass
2.Operating Voltage: ≤10V
3.Response Time: ≤10ms
4.Storage Temperature: −20℃~+70℃
5.Operation Temperature/Humidity : −10℃~+60℃/ 20%~95%
6.Hitting Life: >1,000,000 Times ,250gf Force;
7.writting Life>100,000 Times250gf Force;
8.Connect Material: FPC
9.Film Thickness: 0.188mm
10.Glass Thickness: 0.7mm
11.Light transmission: ≥75%
12.Force: 100g or more
13.Linearity: ≤1.5%
14.Insulation: ≥20MΩ
15.Resistance: Y: 150Ω~380Ω
X: 510Ω~1100Ω
16.Surface Hardness≥3H(pencil)

http://www.bvslcd.cn
Tel:0755-23059953