


Version	MARK	MODIFY	DATE
2.0	FPC	FPC	20100318

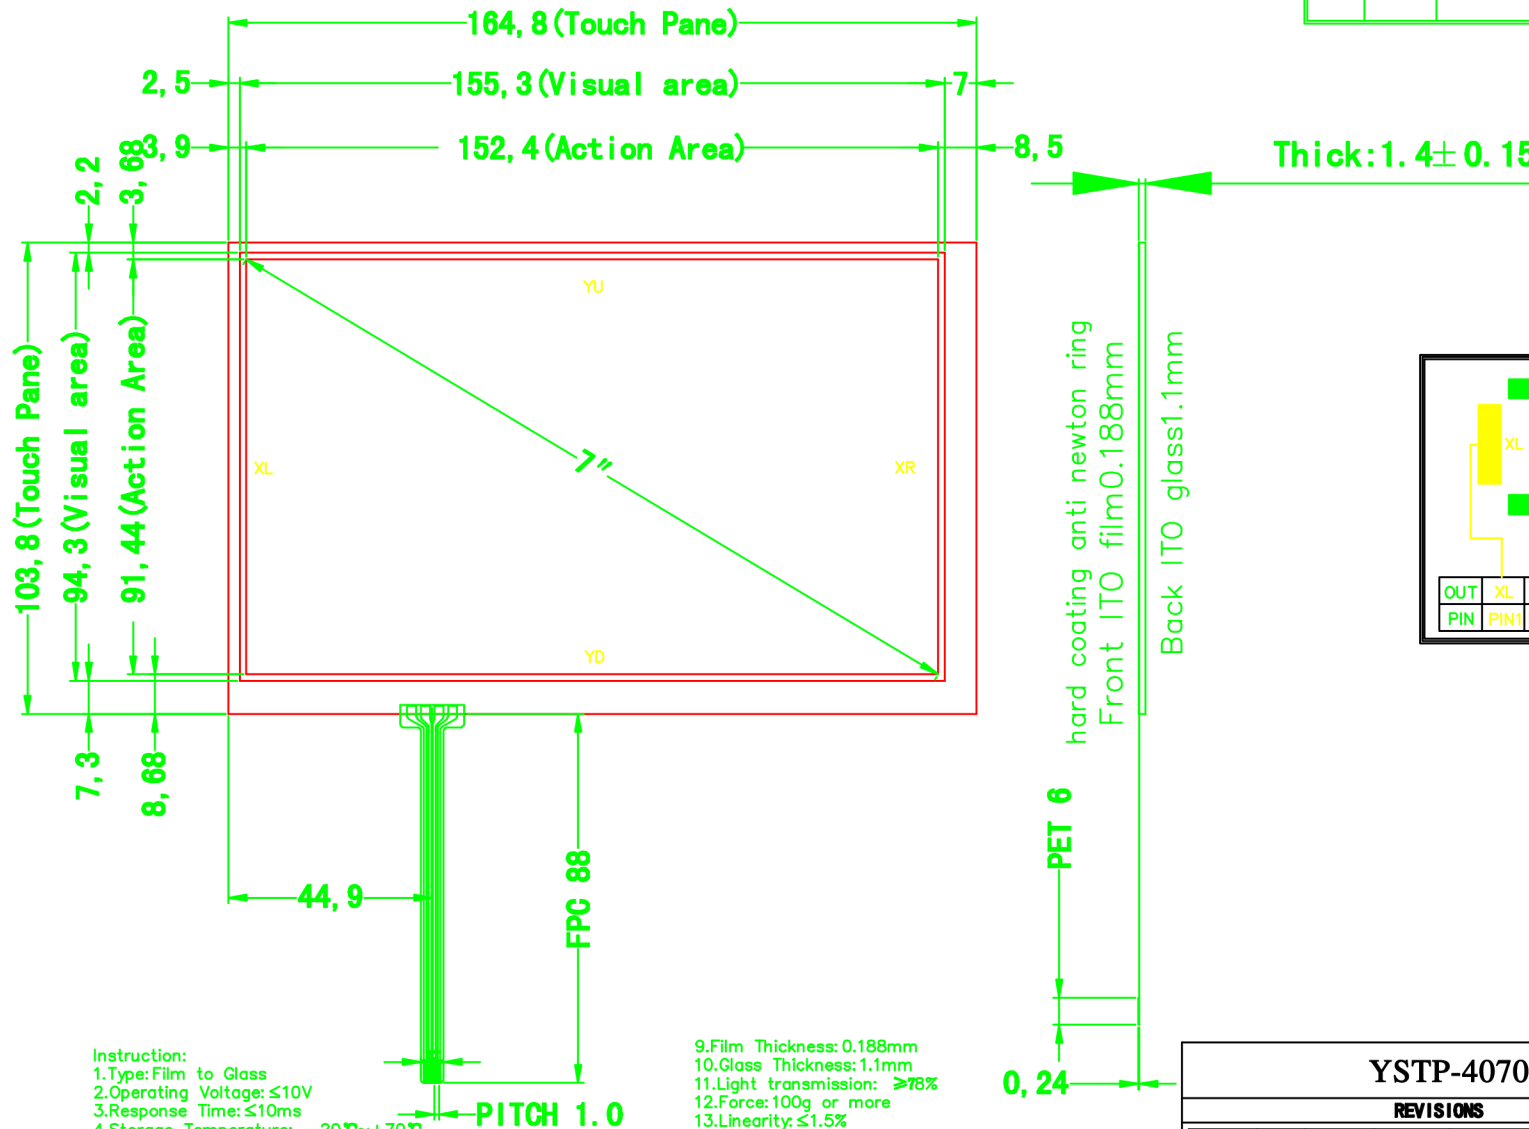

Instruction:
 1.Type: Film to Glass
 2.Operating Voltage: $\leq 10V$
 3.Response Time: $\leq 10ms$
 4.Storage Temperature: $-20^{\circ}C \sim +70^{\circ}C$
 5.Operation Temperature/Humidity: $-10^{\circ}C \sim +60^{\circ}C$ / 20%~95%
 6.Hitting Life: >1,000,000 Times ,250gf Force;
 7.writing Life>100,000 Times 250gf Force;
 8.Connect Material:FPC

9.Film Thickness: 0.188mm
 10.Glass Thickness: 1.1mm
 11.Light transmission: $\geq 78\%$
 12.Force: 100g or more
 13.Linearity: $\leq 1.5\%$
 14.Insulation: $\geq 20M \Omega$
 15.Resistance: Y: 180 $\Omega \sim 330 \Omega$;
 X: 510 $\Omega \sim 900 \Omega$;
 16.Surface Hardness $\geq 3H$ (pencil)

YSTP-4070C6

REVISIONS

SCALE	1:1	MATERIAL	F/G	Version	2.0
UNIT	mm	TOLERANCE	$\pm 0.3m$	NO.	1 of 1
DESIGN	Lucy	DATE	20100318	深圳市永兴盛科技有限公司	
CHECK	Peter + Li	DATE	20100318	T:+86-755-23059953	
RELEASE	Victor	DATE	20100318		