



**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE CQ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE CQ AND MUST BE RETURNED TO BOE CQ UPON ITS REQUEST

**TITLE : NT156WHM-N32**  
**Final Product Specification**  
**Rev. O**

**Chongqing BOE Optoelectronics Technology Co., Ltd**

| SPEC. NUMBER | PRODUCT GROUP | Rev. | ISSUE DATE | PAGE    |
|--------------|---------------|------|------------|---------|
| S871-C017    | TFT-LCD       | O    | 2016.03.16 | 1 OF 33 |



## Contents


| No.  | Items                                                | Page |
|------|------------------------------------------------------|------|
|      | REVISION HISTORY                                     | 2    |
|      | CONTENTS                                             | 3    |
| 1.0  | General Description                                  | 4    |
| 2.0  | Absolute Maximum ratings                             | 6    |
| 3.0  | Electrical specifications.                           | 7    |
| 4.0  | Optical specifications.                              | 10   |
| 5.0  | Interface Connection                                 | 15   |
| 6.0  | Signal Timing Specification                          | 18   |
| 7.0  | Input Signals, Display Colors & Gray Scale of Colors | 20   |
| 8.0  | Power Sequence                                       | 21   |
| 9.0  | Connector description                                | 22   |
| 10.0 | Mechanical Characteristics                           | 23   |
| 11.0 | Reliability Test                                     | 24   |
| 12.0 | Handling & Cautions.                                 | 24   |
| 13.0 | Label                                                | 25   |
| 14.0 | Packing information                                  | 27   |
| 15.0 | Mechanical Outline Dimension                         | 28   |
| 16.0 | EDID Table                                           | 30   |

|            |                      |        |            |
|------------|----------------------|--------|------------|
| <b>BOE</b> | <b>PRODUCT GROUP</b> | REV    | ISSUE DATE |
|            | Customer SPEC        | Rev. O | 2016.03.16 |

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

NT156WHM-N32 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with HD resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

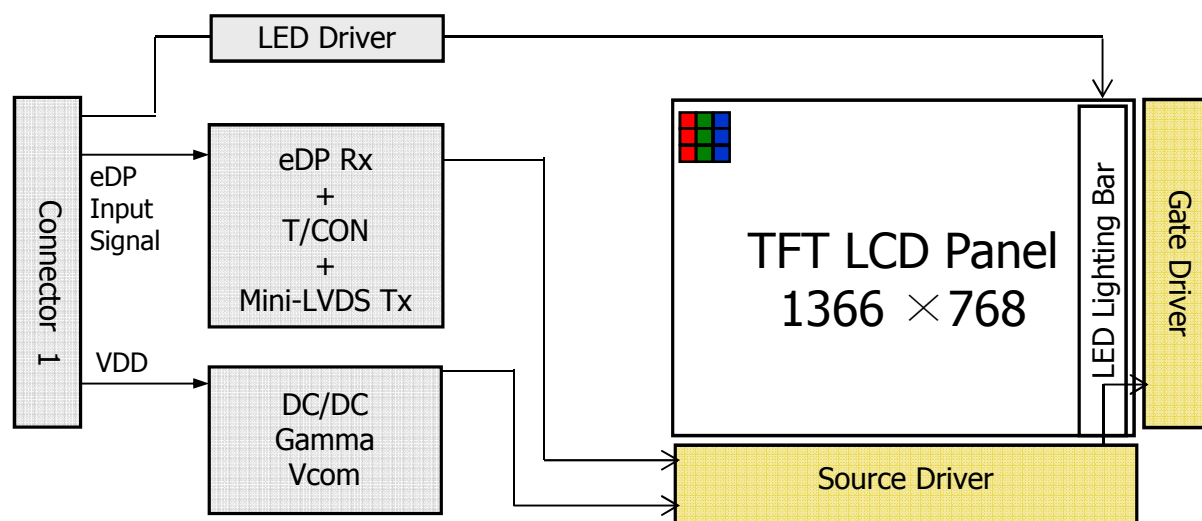

### 1.2 Features

- 1 lane eDP Interface with 1.62Gbps Link Rates
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- No Mounting frame
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

|              |                                           |         |
|--------------|-------------------------------------------|---------|
| SPEC. NUMBER | SPEC. TITLE                               | PAGE    |
| S871-C017    | NT156WHM-N32 Product Specification Rev. O | 4 OF 33 |

|            |                      |        |            |
|------------|----------------------|--------|------------|
| <b>BOE</b> | <b>PRODUCT GROUP</b> | REV    | ISSUE DATE |
|            | Customer SPEC        | Rev. O | 2016.03.16 |

### 1.3 Application

- Notebook PC (Wide type)

### 1.4 General Specification

The followings are general specifications at the model NT156WHM-N32. (listed in Table 1.)

<Table 1. General Specifications>

| Parameter           | Specification                                                    | Unit   | Remarks |
|---------------------|------------------------------------------------------------------|--------|---------|
| Active area         | 344.23(H) × 193.54(V)                                            | mm     |         |
| Number of pixels    | 1366 (H) × 768 (V)                                               | pixels |         |
| Pixel pitch         | 0.252 (H) X 0.252 (V)                                            | mm     |         |
| Pixel arrangement   | RGB Vertical stripe                                              |        |         |
| Display colors      | 262K                                                             | colors |         |
| Display mode        | Normally White                                                   |        |         |
| Dimensional outline | 359.5(H)*223.8(V) (W/PCB)*3.2(Max)<br>359.5(H)*206.5(V)*3.2(Max) | mm     |         |
| Weight              | 370 (max)                                                        | g      |         |
| Surface treatment   | Glare                                                            |        |         |
| Back-light          | Lower Down side, 1-LED Lighting Bar type                         |        | Note 1  |
| Power consumption   | P <sub>D</sub> : 0.65                                            | W      | @Mosaic |
|                     | P <sub>BL</sub> :2.60                                            | W      |         |
|                     | P <sub>total</sub> :3.25                                         | W      |         |

Notes : 1. LED Lighting Bar (36\*LED Array)

|                           |                                                          |                 |
|---------------------------|----------------------------------------------------------|-----------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>5 OF 33 |
|---------------------------|----------------------------------------------------------|-----------------|

## 2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C

| Parameter             | Symbol          | Min.                 | Max.                 | Unit | Remarks |
|-----------------------|-----------------|----------------------|----------------------|------|---------|
| Power Supply Voltage  | V <sub>DD</sub> | -0.3                 | 4.0                  | V    | Note 1  |
| Logic Supply Voltage  | V <sub>IN</sub> | V <sub>SS</sub> -0.3 | V <sub>DD</sub> +0.3 | V    |         |
| Operating Temperature | T <sub>OP</sub> | 0                    | +50                  | °C   | Note 2  |
| Storage Temperature   | T <sub>ST</sub> | -20                  | +60                  | °C   |         |

- Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
2. Temperature and relative humidity range are shown in the figure below.  
 95 % RH Max. ( 40 °C ≥ Ta)  
 Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

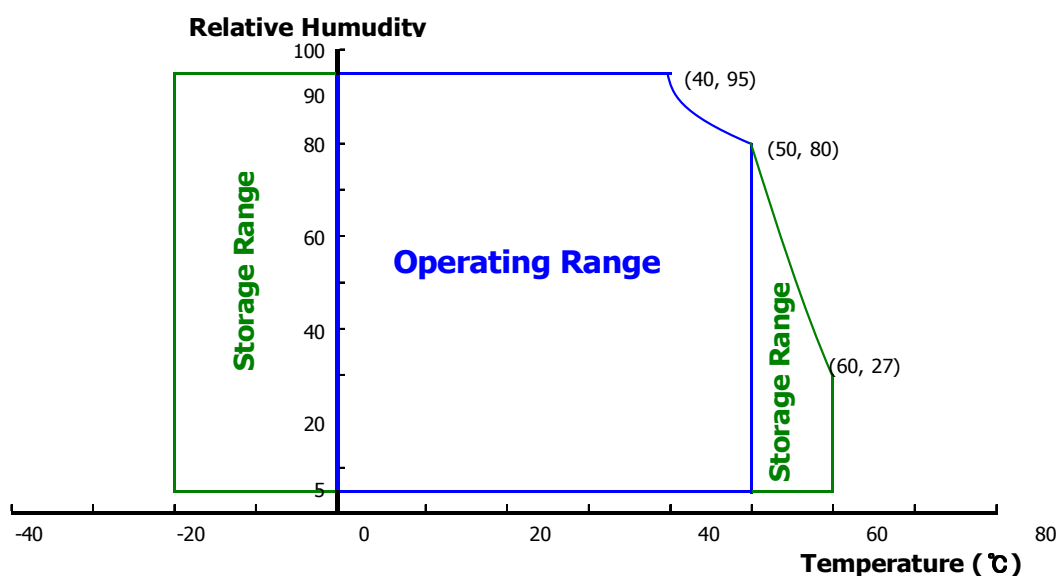

|            |                      |        |            |
|------------|----------------------|--------|------------|
| <b>BOE</b> | <b>PRODUCT GROUP</b> | REV    | ISSUE DATE |
|            | Customer SPEC        | Rev. O | 2016.03.16 |

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C

| Parameter                        |                    | Min. | Typ. | Max. | Unit | Remarks                   |
|----------------------------------|--------------------|------|------|------|------|---------------------------|
| Power Supply Voltage             | V <sub>DD</sub>    | 3.0  | 3.3  | 3.6  | V    | Note 1                    |
| Permissible Input Ripple Voltage | V <sub>RF</sub>    | -    | -    | 100  | mV   | At V <sub>DD</sub> = 3.3V |
| Power Supply Current             | I <sub>DD</sub>    | -    | 197  | 303  | mA   | Note 1                    |
| Differential Input Voltage       | V <sub>ID</sub>    | 100  | -    | 600  | mV   |                           |
| Power Consumption                | P <sub>D</sub>     | -    | 0.65 | 1.0  | W    | Note 1                    |
|                                  | P <sub>BL</sub>    | -    | -    | 2.6  | W    | Note 2                    |
|                                  | P <sub>total</sub> | -    | -    | 3.6  | W    |                           |

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.  
The current draw and power consumption specified is for 3.3V at 25°C.

a) Typ : Mosaic Pattern

b) Max : Skip sub pixel255

2. Calculated value for reference (V<sub>LED</sub> × I<sub>LED</sub>)

|                           |                                                          |                 |
|---------------------------|----------------------------------------------------------|-----------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>7 OF 33 |
|---------------------------|----------------------------------------------------------|-----------------|

## 3.2 Backlight Unit

&lt; Table 4. LED Driving guideline specifications &gt;

Ta=25+/-2°C

| Parameter                           |                | Min.             | Typ.   | Max. | Unit   | Remarks |                       |
|-------------------------------------|----------------|------------------|--------|------|--------|---------|-----------------------|
| LED Forward Voltage                 |                | V <sub>F</sub>   | -      | -    | 3.1    | V       | -                     |
| LED Forward Current                 |                | I <sub>F</sub>   | -      | 20   | -      | mA      | -                     |
| LED Power Consumption               |                | P <sub>LED</sub> |        | -    | 2.6    | W       | Note 1                |
| LED Life-Time                       |                | N/A              | 15,000 | -    | -      | Hour    | I <sub>F</sub> = 20mA |
| Power supply voltage for LED Driver |                | V <sub>LED</sub> | 5      | 12   | 21     | V       |                       |
| EN Control Level                    | Backlight on   |                  | 2.5    |      | 5.0    | V       |                       |
|                                     | Backlight off  |                  | 0      |      | 0.6    | V       |                       |
| PWM Control Level                   | PWM High Level |                  | 2.5    |      | 5.0    | V       |                       |
|                                     | PWM Low Level  |                  | 0      |      | 0.6    | V       |                       |
| PWM Control Frequency               |                | F <sub>PWM</sub> | 100    | -    | 10,000 | Hz      |                       |
| Duty Ratio                          |                | -                | 1      | -    | 100    | %       | Note3                 |

Notes : 1. Power supply voltage 12V for LED Driver


Calculator Value for reference  $I_F \times V_F \times 36 / \text{efficiency} = P_{LED}$ 

2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

### 3.3 LED structure

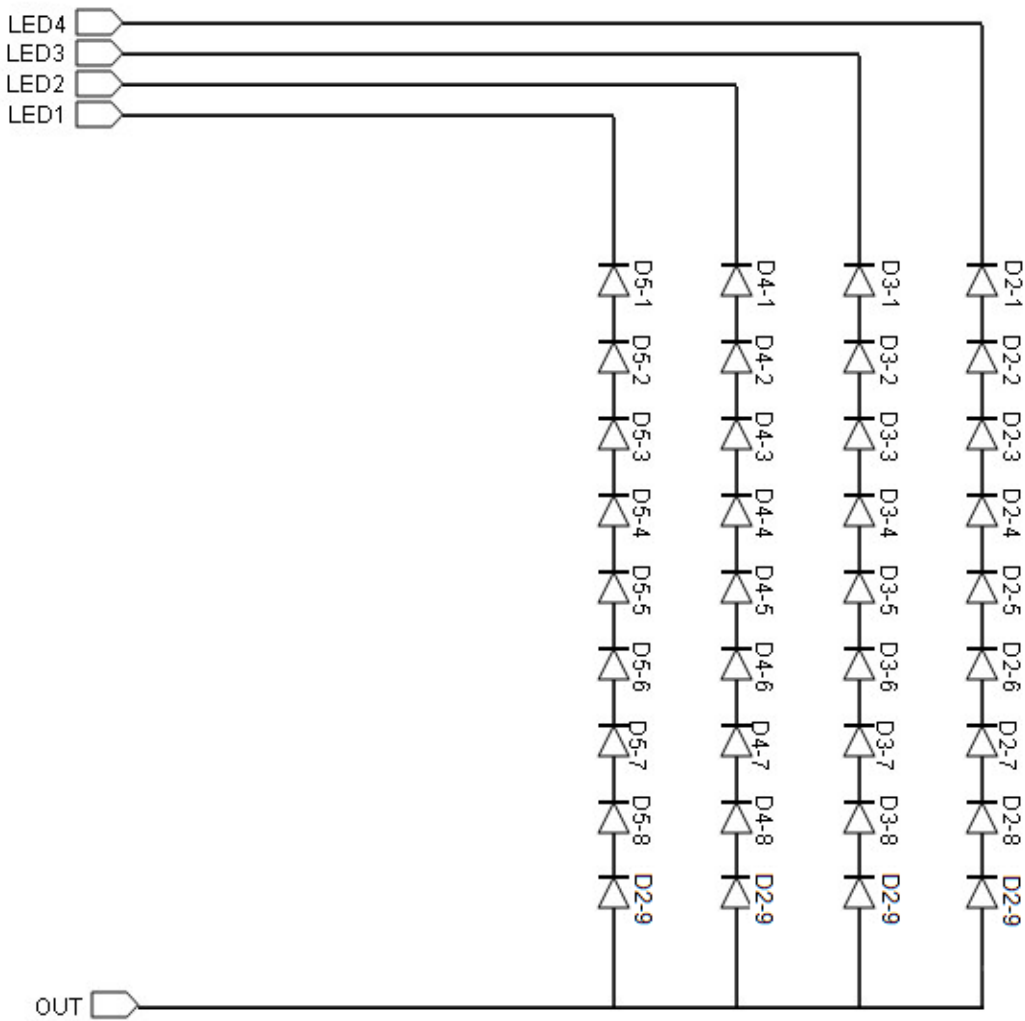

|                           |                                                          |                 |
|---------------------------|----------------------------------------------------------|-----------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>9 OF 33 |
|---------------------------|----------------------------------------------------------|-----------------|

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

## 4.0 OPTICAL SPECIFICATION

### 4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^\circ$ . We refer to  $\theta\phi=0$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta\phi=90$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta\phi=180$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta\phi=270$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\phi$ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be  $3.3 \pm 0.3\text{V}$  at  $25^\circ\text{C}$ . Optimum viewing angle direction is 6 'clock.

### 4.2 Optical Specifications

<Table 5. Optical Specifications>

| Parameter                        |            | Symbol          | Condition                                     | Min.  | Typ.  | Max.  | Unit              | Remark |
|----------------------------------|------------|-----------------|-----------------------------------------------|-------|-------|-------|-------------------|--------|
| Viewing Angle range              | Horizontal | $\Theta_3$      | CR > 10                                       | -     | 45    | -     | Deg.              | Note 1 |
|                                  |            | $\Theta_9$      |                                               | -     | 45    | -     | Deg.              |        |
|                                  | Vertical   | $\Theta_{12}$   |                                               | -     | 20    | -     | Deg.              |        |
|                                  |            | $\Theta_6$      |                                               | -     | 40    | -     | Deg.              |        |
| Luminance Contrast ratio         |            | CR              | $\Theta = 0^\circ$                            | -     | 500   |       |                   | Note 2 |
| Luminance of White               | 5 Points   | $Y_w$           | $\Theta = 0^\circ$<br>I <sub>LED</sub> = 20mA | 187   | 220   | -     | cd/m <sup>2</sup> | Note 3 |
| White Luminance uniformity       | 5 Points   | $\Delta Y_5$    |                                               | 80    | -     | -     |                   | Note 4 |
|                                  | 13 Points  | $\Delta Y_{13}$ |                                               | 65    | -     | -     |                   |        |
| White Chromaticity               |            | $x_w$           | $\Theta = 0^\circ$                            | 0.283 | 0.313 | 0.343 |                   | Note 5 |
|                                  |            | $y_w$           |                                               | 0.299 | 0.329 | 0.359 |                   |        |
| Reproduction of color            | Red        | $x_R$           | $\Theta = 0^\circ$                            | -0.03 | 0.590 | +0.03 |                   |        |
|                                  |            | $y_R$           |                                               |       | 0.350 |       |                   |        |
|                                  |            | Green           |                                               |       | $x_G$ |       | 0.330             |        |
|                                  | $y_G$      |                 |                                               |       | 0.555 |       |                   |        |
|                                  | Blue       | $x_B$           |                                               |       | 0.153 |       |                   |        |
|                                  |            | $y_B$           |                                               |       | 0.119 |       |                   |        |
|                                  | Gamut      |                 |                                               |       |       |       |                   |        |
| Response Time (Rising + Falling) |            | T <sub>RT</sub> | Ta= 25° C<br>$\Theta = 0^\circ$               | -     | 12    | -     | ms                | Note 6 |
| Cross Talk                       |            | CT              | $\Theta = 0^\circ$                            | -     | -     | 2.0   | %                 | Note 7 |

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>10 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|

|            |               |        |            |
|------------|---------------|--------|------------|
| <b>BOE</b> | PRODUCT GROUP | REV    | ISSUE DATE |
|            | Customer SPEC | Rev. O | 2016.03.16 |

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of  $\Theta = 0$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state.

(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$ .  
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_r$ , and 90% to 10% is  $T_d$ .


7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark.  
(See FIGURE 5).

|              |                                           |          |
|--------------|-------------------------------------------|----------|
| SPEC. NUMBER | SPEC. TITLE                               | PAGE     |
| S871-C017    | NT156WHM-N32 Product Specification Rev. O | 11 OF 33 |

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |


### 4.3 Optical measurements

Figure 1. Measurement Set Up

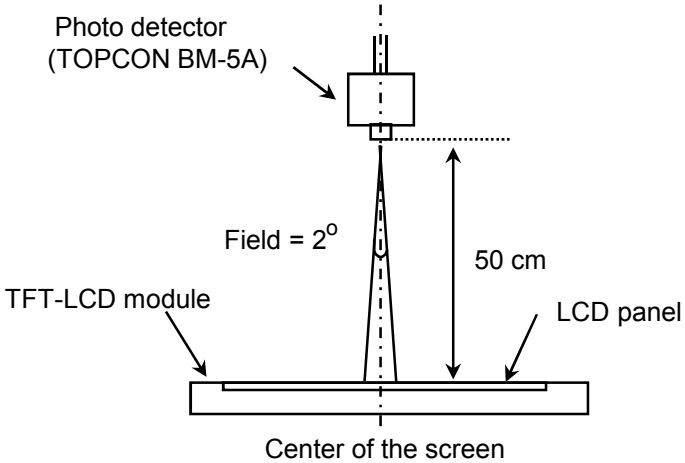

Optical characteristics measurement setup

Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

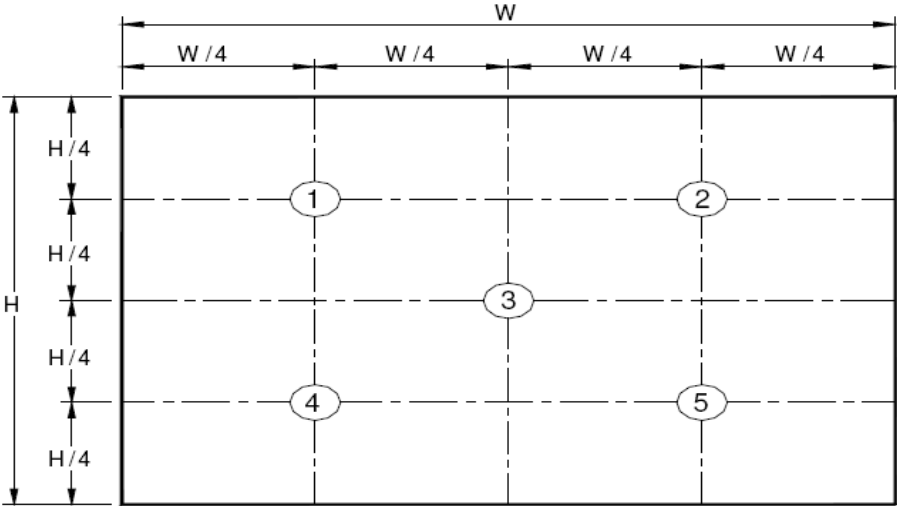


Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

|              |                                           |          |
|--------------|-------------------------------------------|----------|
| SPEC. NUMBER | SPEC. TITLE                               | PAGE     |
| S871-C017    | NT156WHM-N32 Product Specification Rev. O | 12 OF 33 |


|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

**Figure 3. Uniformity Measurement Locations (13 points)**

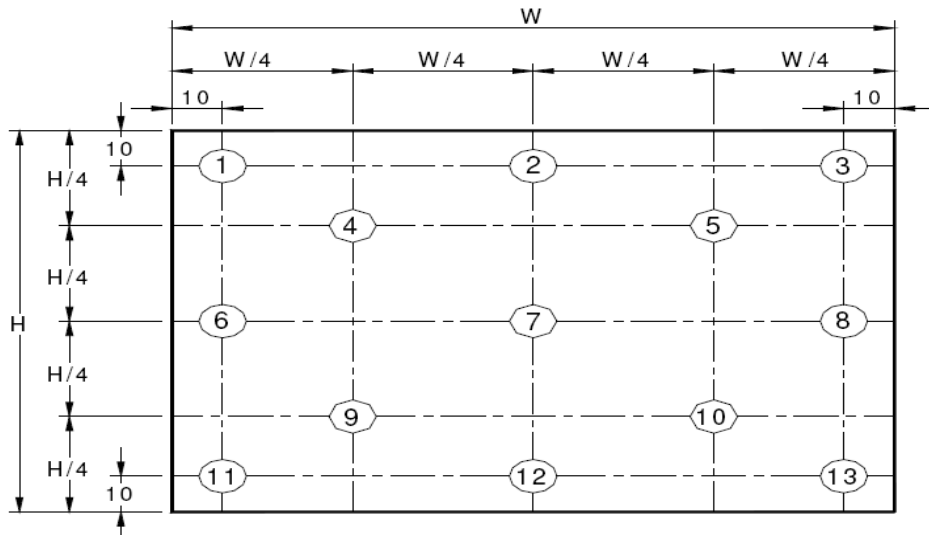

The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y_5$  = Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2) ,  $\Delta Y_{13}$  = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see FIGURE 3).

**Figure 4. Response Time Testing**

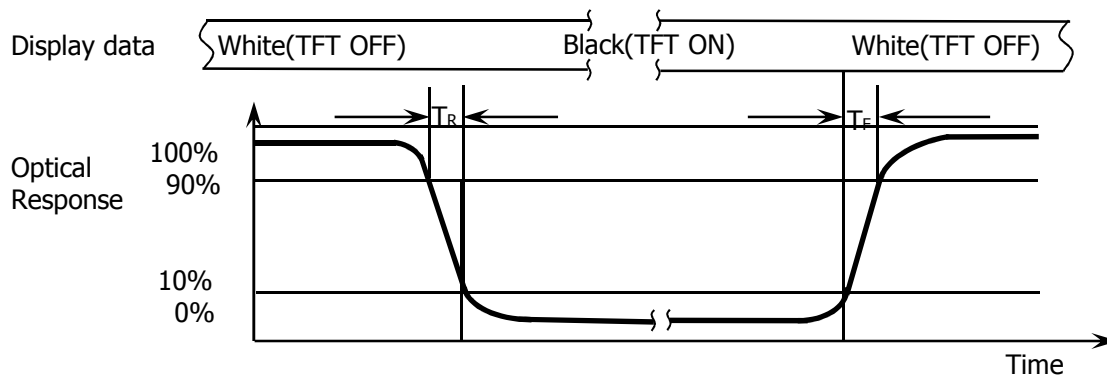


The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_d$  and 90% to 10% is  $T_r$ .

|              |                                           |          |
|--------------|-------------------------------------------|----------|
| SPEC. NUMBER | SPEC. TITLE                               | PAGE     |
| S871-C017    | NT156WHM-N32 Product Specification Rev. O | 13 OF 33 |

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

**Figure 5. Cross Modulation Test Description**

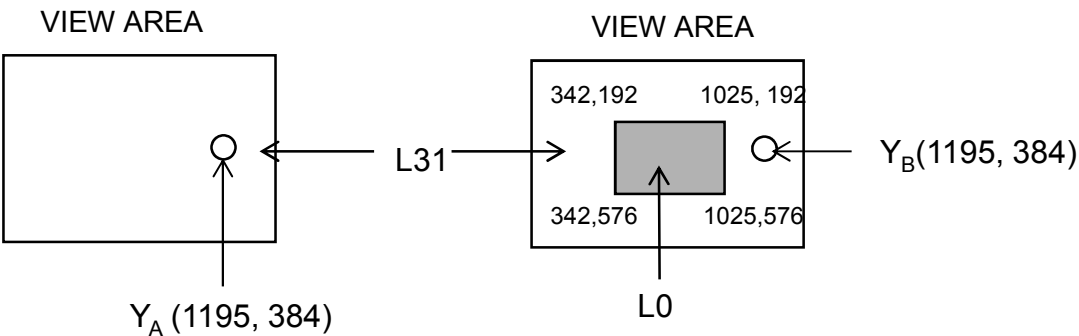

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

$Y_A$  = Initial luminance of measured area (cd/m<sup>2</sup>)

$Y_B$  = Subsequent luminance of measured area (cd/m<sup>2</sup>)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

|              |                                           |          |
|--------------|-------------------------------------------|----------|
| SPEC. NUMBER | SPEC. TITLE                               | PAGE     |
| S871-C017    | NT156WHM-N32 Product Specification Rev. O | 14 OF 33 |

## 5.0 INTERFACE CONNECTION.

### 5.1 Electrical Interface Connection

The electronics interface connector is STM MSAK24025P30 or Compatible.


The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

| Terminal | Symbol        | Functions                   |
|----------|---------------|-----------------------------|
| Pin No.  | Symbol        | Description                 |
| 1        | CABC_ENABLE   | 预留CABC功能,暂不开启               |
| 2        | H_GND         | Ground                      |
| 3        | NC            | No Connection               |
| 4        | NC            | No Connection               |
| 5        | H_GND         | Ground                      |
| 6        | LANE0_N       | eDP RX channel 0 negative   |
| 7        | LANE0_P       | eDP RX channel 0 positive   |
| 8        | H_GND         | Ground                      |
| 9        | AUX_CH_P      | eDP AUX CH positive         |
| 10       | AUX_CH_N      | eDP AUX CH negative         |
| 11       | H_GND         | Ground                      |
| 12       | LCD_VCC       | Power Supply, 3.3V (typ.)   |
| 13       | LCD_VCC       | Power Supply, 3.3V (typ.)   |
| 14       | LCD_Self_Test | Panel self test enable      |
| 15       | H_GND         | Ground                      |
| 16       | H_GND         | Ground                      |
| 17       | HPD           | Hot plug detect output      |
| 18       | BL_GND        | LED Ground                  |
| 19       | BL_GND        | LED Ground                  |
| 20       | BL_GND        | LED Ground                  |
| 21       | BL_GND        | LED Ground                  |
| 22       | BL_ENABLE     | LED enable pin(+3.3V Input) |
| 23       | BL_PWM        | System PWM Signal Input     |
| 24       | NC            | No Connection               |
| 25       | COLOR_ENABLE  | test enable                 |
| 26       | BL_POWER      | LED Power Supply 5V-21V     |
| 27       | BL_POWER      | LED Power Supply 5V-21V     |
| 28       | BL_POWER      | LED Power Supply 5V-21V     |
| 29       | BL_POWER      | LED Power Supply 5V-21V     |
| 30       | NC            | No Connection               |

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

## 5-2. eDP Interface

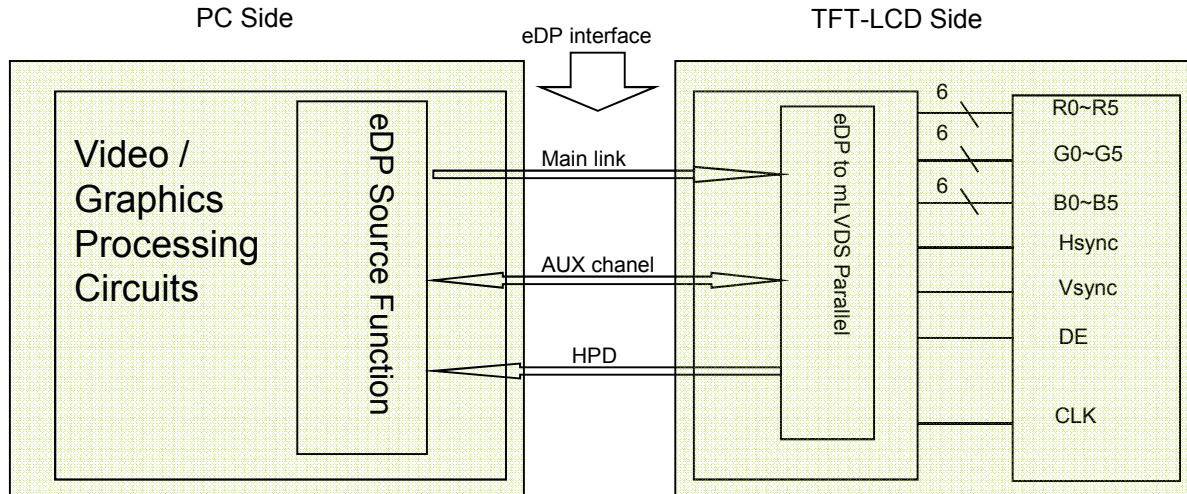

Note. Transmitter : Parade DP501 or equivalent.  
Transmitter is not contained in Module.

## 5.3.eDP Input signal

| Lane 0 |        |
|--------|--------|
| R0-5:0 | G0-5:4 |
| G0-3:0 | B0-5:2 |
| B0-1:0 | R1-5:0 |
| G1-5:0 | B1-5:4 |
| B1-3:0 | R2-5:2 |
| R2-1:0 | G2-5:0 |
| B2-5:0 | R3-5:4 |
| R3-3:0 | G3-5:2 |
| G3-1:0 | B3-5:0 |

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>16 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|

**5.4 Back-light & LCM Interface Connection**Interface Connector: **UJU** PF040-B09B-C09

&lt;Table 7. Pin Assignments for the BLU &amp; LCM Connector&gt;

| Pin No. | Symbol | Description            | Pin No. | Symbol | Description          |
|---------|--------|------------------------|---------|--------|----------------------|
| 1       | LED1   | LED cathode connection | 6       | NC     | No Connection        |
| 2       | LED2   | LED cathode connection | 7       | Vout   | LED anode connection |
| 3       | LED3   | LED cathode connection | 8       | Vout   | LED anode connection |
| 4       | LED4   | LED cathode connection | 9       | Vout   | LED anode connection |
| 5       | NC     | No Connection          |         |        |                      |

## 6.0 SIGNAL TIMING SPECIFICATION

6.1 The NT156WHM-N32 is operated by the DE only.

| Item                      |           | Symbols | Min  | Typ  | Max  | Unit   |
|---------------------------|-----------|---------|------|------|------|--------|
| Clock                     | Frequency | 1/Tc    | 67.5 | 72.3 | 76.3 | MHz    |
|                           | High Time | Tch     | -    | 4/7  | -    | Tc     |
|                           | Low Time  | Tcl     | -    | 3/7  | -    | Tc     |
| Frame Period              |           | Tv      | 778  | 790  | 802  | lines  |
|                           |           |         | -    | 60   | -    | Hz     |
|                           |           |         | -    | 16.7 | -    | ms     |
| Vertical Display Period   |           | Tvd     | 768  | 768  | 768  | lines  |
| One line Scanning Period  |           | Th      | 1446 | 1526 | 1586 | clocks |
| Horizontal Display Period |           | Thd     | 1366 | 1366 | 1366 | clocks |

Note\*: This Module can support low frame refresh rate 50Hz & 40Hz.

**6.2 eDP Rx Interface Timing Parameter**

The specification of the eDP Rx interface timing parameter is shown in Table 8.

&lt;Table 8. eDP Rx Interface Timing Specification&gt;

| Item                                                                            | Symbol              | Min | Typ | Max  | Unit     | Remark |
|---------------------------------------------------------------------------------|---------------------|-----|-----|------|----------|--------|
| Spread spectrum clock                                                           | SSC                 |     | 0.5 |      | %        |        |
| Differential peak-to-peak input voltage at package pins                         | VRX-DIFFp-p         | 100 | 0   | 1320 | mV       |        |
| Rx input DC common mode voltage                                                 | VRX_DC_CM           | -   | GND | -    | V        |        |
| Differential termination resistance                                             | RRX-DIFF            | 80  | -   | 100  | $\Omega$ |        |
| Single-ended termination resistance                                             | RRX-SE              | 40  | -   | 60   | $\Omega$ |        |
| Rx short circuit current limit                                                  | IRX_SHORT           | -   | -   | 20   | mA       |        |
| Intra-pair skew at Rx package pins (HBR)<br>RX intra-pair skew tolerance at HBR | LRX_SKEW_INTRA_PAIR | -   | -   | 150  | ps       |        |


## 7.0 INPUT SIGNALS, BASIC DISPLAY COLORS &amp; GRAY SCALE OF COLORS

|                             | Colors &<br>Gray scale | Data signal |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------------|------------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|                             |                        | R0          | R1 | R2 | R3 | R4 | R5 | G0 | G1 | G2 | G3 | G4 | G5 | B0 | B1 | B2 | B3 | B4 | B5 |
| Basic colors                | Black                  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Blue                   | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                             | Green                  | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Light Blue             | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
|                             | Red                    | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Purple                 | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                             | Yellow                 | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | White                  | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| Gray scale of Red           | Black                  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                      | 1           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker                 | 0           | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                      | ↑           |    |    |    |    |    | ↑  |    |    |    |    |    | ↑  |    |    |    |    |    |
|                             | ▽                      | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                             | Brighter               | 1           | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | ▽                      | 0           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Red                    | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Gray scale of Green         | Black                  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                      | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker                 | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                      | ↑           |    |    |    |    |    | ↑  |    |    |    |    |    | ↑  |    |    |    |    |    |
|                             | ▽                      | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                             | Brighter               | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | ▽                      | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Green                  | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| Gray scale of Blue          | Black                  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                      | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker                 | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |
|                             | △                      | ↑           |    |    |    |    |    | ↓  |    |    |    |    |    | ↑  |    |    |    |    |    |
|                             | ▽                      | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                             | Brighter               | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  |
|                             | ▽                      | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  |
|                             | Blue                   | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
| Gray scale of White & Black | Black                  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                      | 1           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker                 | 0           | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |
|                             | △                      | ↑           |    |    |    |    |    | ↑  |    |    |    |    |    | ↑  |    |    |    |    |    |
|                             | ▽                      | ↓           |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                             | Brighter               | 1           | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  |
|                             | ▽                      | 0           | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  |
|                             | White                  | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

## 8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

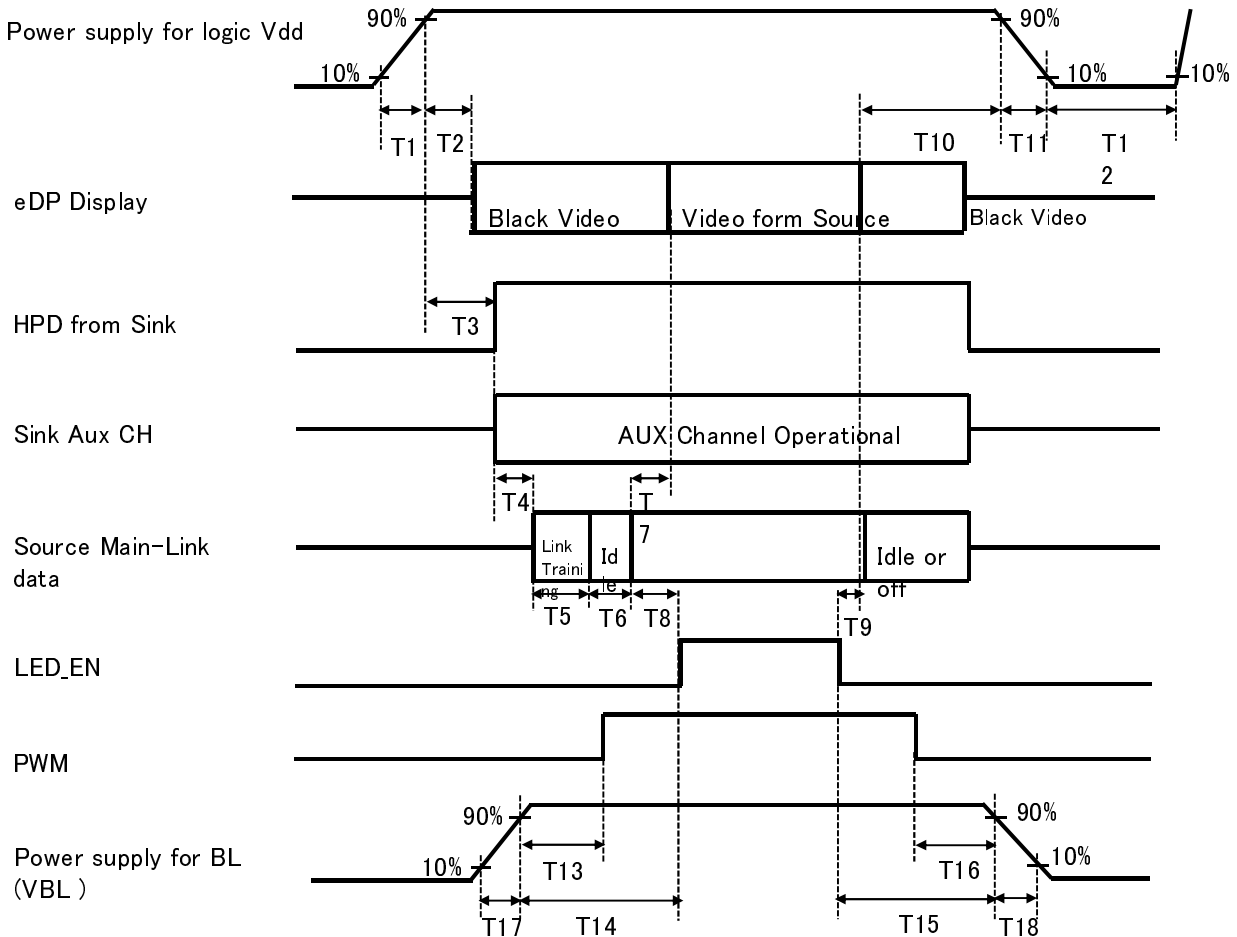

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} \leq T2 \leq 200\text{ms}$
- $0\text{ms} \leq T3 \leq 200\text{ms}$
- $0\text{ms} \leq T13$
- $0\text{ms} \leq T14$
- $0\text{ms} \leq T17$
- $0\text{ms} \leq T7 \leq 50\text{ms}$
- $0\text{ms} \leq T10 \leq 500\text{ms}$
- $0\text{ms} \leq T11 \leq 10\text{ms}$
- $150\text{ms} \leq T12$
- $0\text{ms} \leq T15$
- $0\text{ms} \leq T16$
- $0\text{ms} \leq T18$

Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

|              |                                           |          |
|--------------|-------------------------------------------|----------|
| SPEC. NUMBER | SPEC. TITLE                               | PAGE     |
| S871-C017    | NT156WHM-N32 Product Specification Rev. O | 21 OF 33 |

|            |                      |            |                   |
|------------|----------------------|------------|-------------------|
| <b>BOE</b> | <b>PRODUCT GROUP</b> | <b>REV</b> | <b>ISSUE DATE</b> |
|            | Customer SPEC        | Rev. O     | 2016.03.16        |

## 9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

### 9.1 TFT LCD Module

| Connector Name /Description | For Signal Connector           |
|-----------------------------|--------------------------------|
| Manufacturer                | STM or Compatible              |
| Type/ Part Number           | MSAK24025P30 or Compatible     |
| Mating housing/ Part Number | I-PEX 20454-030T or Compatible |

|                                  |                                                                 |                         |
|----------------------------------|-----------------------------------------------------------------|-------------------------|
| <b>SPEC. NUMBER</b><br>S871-C017 | <b>SPEC. TITLE</b><br>NT156WHM-N32 Product Specification Rev. O | <b>PAGE</b><br>22 OF 33 |
|----------------------------------|-----------------------------------------------------------------|-------------------------|

|            |                      |            |                   |
|------------|----------------------|------------|-------------------|
| <b>BOE</b> | <b>PRODUCT GROUP</b> | <b>REV</b> | <b>ISSUE DATE</b> |
|            | Customer SPEC        | Rev. O     | 2016.03.16        |

## 10.0 MECHANICAL CHARACTERISTICS

### 10.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NT156WHM-N32.  
Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

| Parameter           | Specification                                                    | Unit |
|---------------------|------------------------------------------------------------------|------|
| Active Area         | 344.23 (H) × 193.54(V)                                           |      |
| Number of pixels    | 1366 (H) X 768 (V) (1 pixel = R + G + B dots)                    |      |
| Pixel pitch         | 0.252 (H) X 0.252 (V)                                            |      |
| Pixel arrangement   | RGB Vertical stripe                                              |      |
| Display colors      | 262K                                                             |      |
| Display mode        | Normally white                                                   |      |
| Dimensional outline | 359.5(H)*223.8(V) (W/PCB)*3.2(Max)<br>359.5(H)*206.5(V)*3.2(Max) | mm   |
| Weight              | 370(Max)                                                         | gram |
| Back Light          | Connector PF040-B09B-C09                                         |      |
|                     | LED, Horizontal-LED Array type                                   |      |

### 10.2 Mounting

See FIGURE 6.

### 10.3 Glare and Polarizer Hardness.

The surface of the LCD has an glare coating to maximize readability and hard coating to reduce scratching.

### 10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>23 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|

**11.0 RELIABILITY TEST**

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

| No | Test Items                                       | Conditions                                                          |
|----|--------------------------------------------------|---------------------------------------------------------------------|
| 1  | High temperature storage test                    | Ta = 60 °C, 240 hrs                                                 |
| 2  | Low temperature storage test                     | Ta = -20 °C, 240 hrs                                                |
| 3  | High temperature & high humidity operation test  | Ta = 50 °C, 80%RH, 240 hrs                                          |
| 4  | High temperature operation test                  | Ta = 50 °C, 240 hrs                                                 |
| 5  | Low temperature operation test                   | Ta = 0 °C, 240 hrs                                                  |
| 6  | Thermal shock                                    | Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle                             |
| 7  | Vibration test<br>(non-operating)                | 1.5G, 10~500Hz, Half Sine<br>X,Y,Z / Sweep rate : 1 hour            |
| 8  | Shock test<br>(non-operating)                    | 220G, Half Sine Wave 2msec<br>± X, ± Y, ± Z Once for each direction |
| 9  | Electro-static discharge test<br>(non-operating) | Air : 150 pF, 330Ω, 15 KV<br>Contact : 150 pF, 330Ω, 8 KV           |

**12.0 HANDLING & CAUTIONS**

## (1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

## (2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

## (3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.



|            |               |        |            |
|------------|---------------|--------|------------|
| <b>BOE</b> | PRODUCT GROUP | REV    | ISSUE DATE |
|            | Customer SPEC | Rev. O | 2016.03.16 |

(2) High voltage caution label

|                                                                                   |                                                                              |                                                                                                                                                       |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | HIGH VOLTAGE<br>CAUTION                                                      | COLD CATHODE FLUORESCENT LAMP IN LCD<br>PANEL CONTAINS A SMALL AMOUNT<br>OF MERCURY. PLEASE FOLLOW LOCAL OR-<br>DINANCES OR REGULATIONS FOR DISPOSAL. |
|                                                                                   | RISK OF ELECTRIC SHOCK,<br>DISCONNECT THE ELECTRIC<br>POWER BEFORE SERVICING |                                                                                                                                                       |

(3) Box label

|                          |   |                                                                                       |   |
|--------------------------|---|---------------------------------------------------------------------------------------|---|
| <b>BOE</b>               |   | CHONGQING BOE OPTOELECTRONICS<br>TECHNOLOGY Co., LTD                                  |   |
| MODEL: XXXXXXX-XXX       | ① | Q'TY: XX                                                                              | ② |
| SERIAL NO: XXXXXXXXXXXXX | ③ | DATE: XXXXXXXX                                                                        | ④ |
| BOX ID 条形码               |   |  |   |
| XXXXXXXXXX               | ⑤ | XXXX                                                                                  | ⑥ |
|                          |   | XXXX                                                                                  | ⑦ |

序列号标注部分需打印, 说明如下:

1. FG-CODE(前12位)
2. 产品数量
3. Box ID
4. 包装日期
5. 客户端段物料号(客户端)---842645-LD1
6. FG-Code后四位
7. 供应商代码 ---暂不打印

Total Size:100×50mm


| Digit       | 1            | 2 | 3     | 4    | 5    | 6 | 7     | 8             | 9         | 10 | 11 | 12 | 13 |
|-------------|--------------|---|-------|------|------|---|-------|---------------|-----------|----|----|----|----|
| Code        | S            | L | S     | 5    | 1    | 2 | 3     | D             | 0         | 0  | 0  | 6  | 8  |
| Description | Products GBN |   | Grade | Line | Year |   | Month | Revision Code | Serial No |    |    |    |    |

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>26 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

## 14.0 PACKING INFORMATION

### 15.1 Packing order

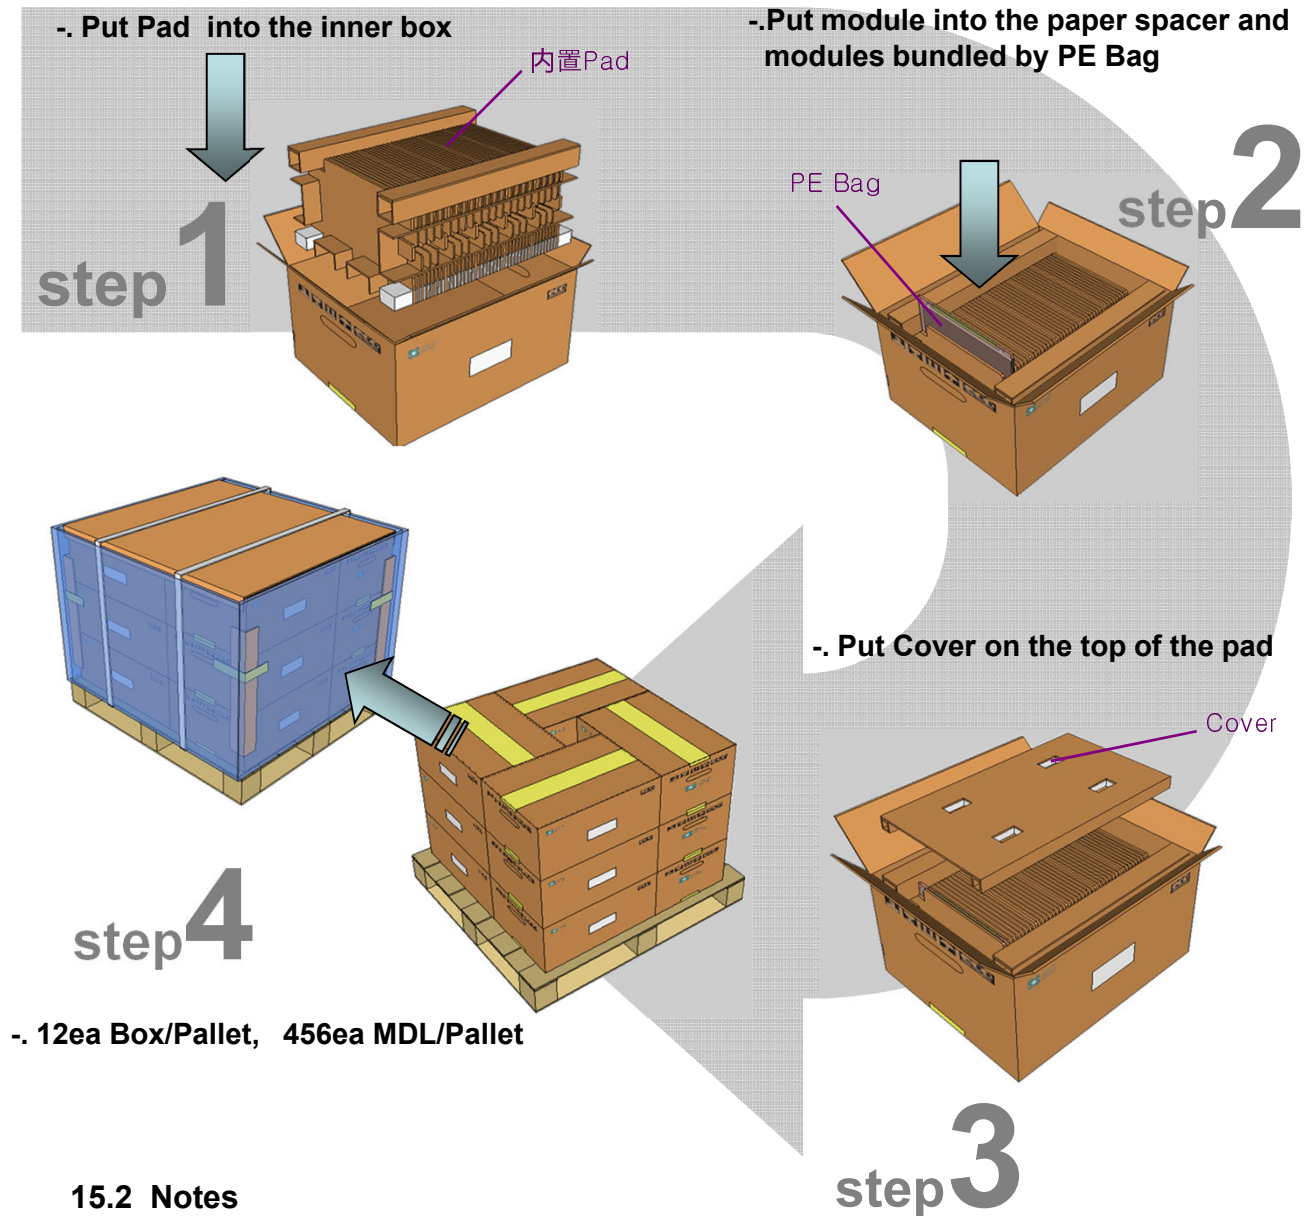

### 15.2 Notes


- Box Dimension: 480\*565\*303mm
- Package Quantity in one Box: 38pcs
- Total Weight: 18.9±0.1kg

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>27 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

15.0 MECHANICAL OUTLINE DIMENSION


Figure 6. TFT-LCD Module Outline Dimension (Front View)

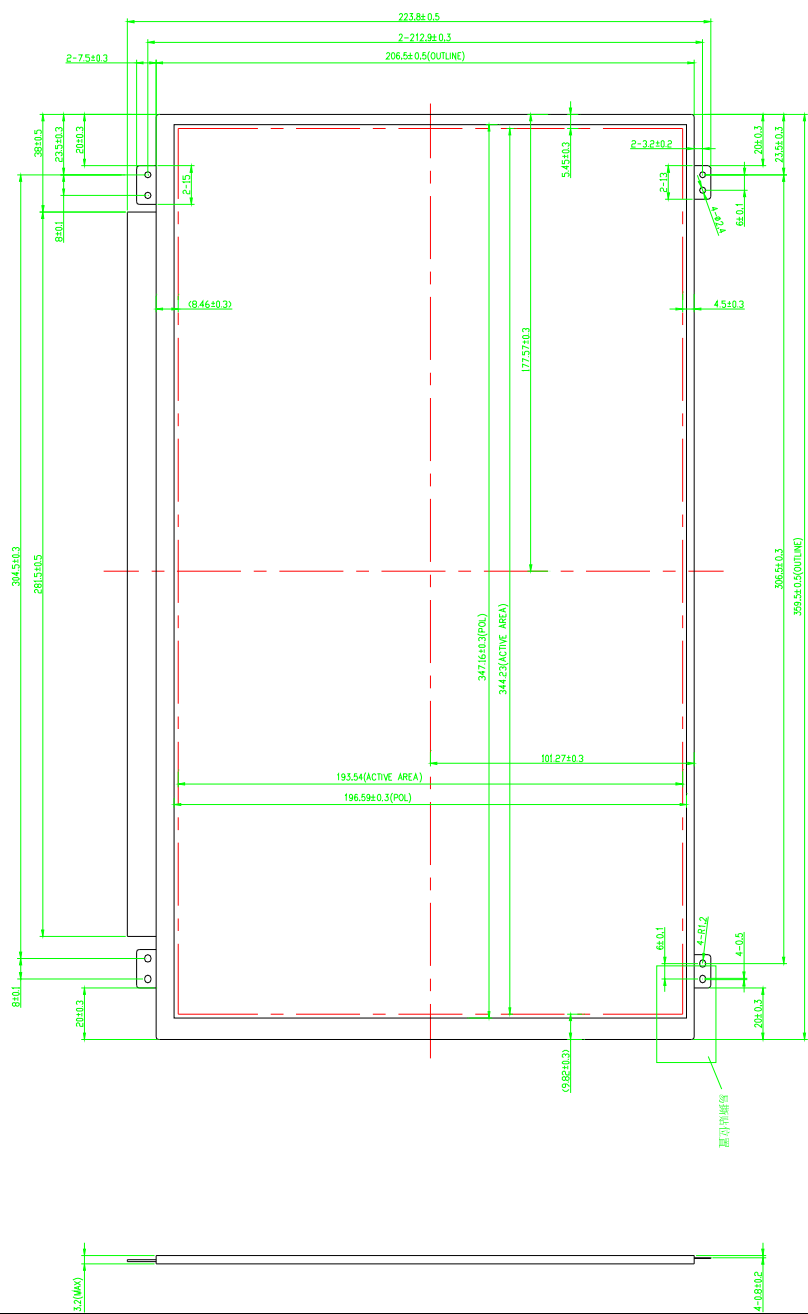

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>28 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|

|     |               |        |            |
|-----|---------------|--------|------------|
| BOE | PRODUCT GROUP | REV    | ISSUE DATE |
|     | Customer SPEC | Rev. O | 2016.03.16 |

Figure 7. TFT-LCD Module Outline Dimensions (Rear view)

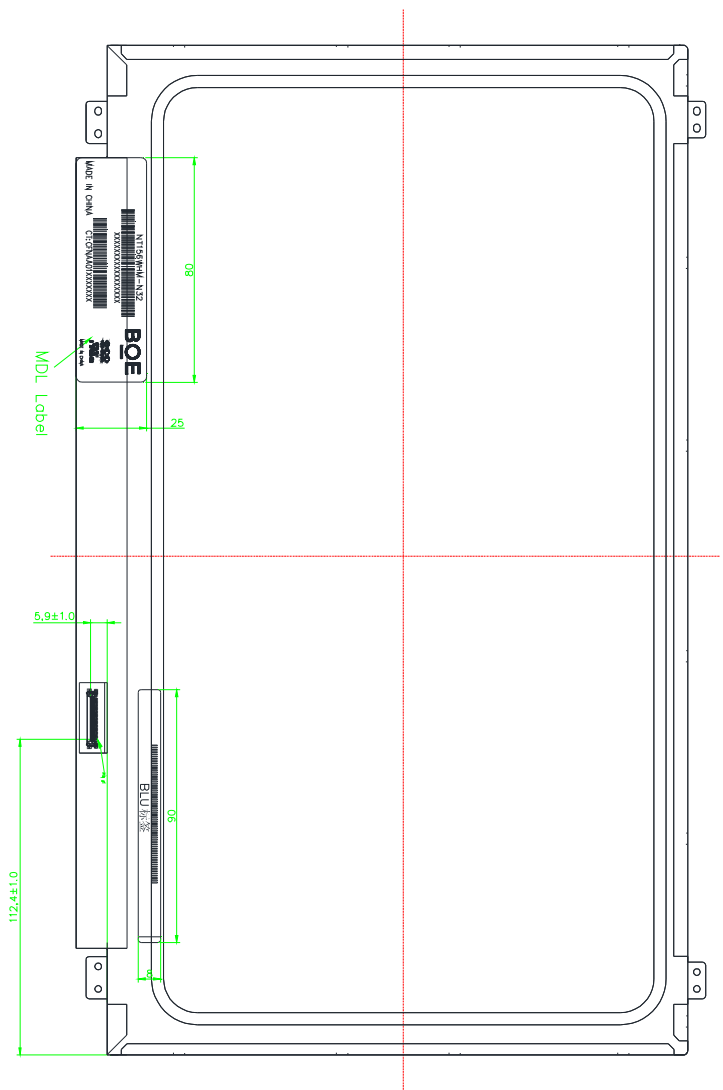

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>29 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|

**16.0 EDID Table**

| Address (HEX) | Function               | Hex | Dec | Input values. | Notes                               |
|---------------|------------------------|-----|-----|---------------|-------------------------------------|
| 00            | Header                 | 00  | 0   | 0             | EDID Header                         |
| 01            |                        | FF  | 255 | 255           |                                     |
| 02            |                        | FF  | 255 | 255           |                                     |
| 03            |                        | FF  | 255 | 255           |                                     |
| 04            |                        | FF  | 255 | 255           |                                     |
| 05            |                        | FF  | 255 | 255           |                                     |
| 06            |                        | FF  | 255 | 255           |                                     |
| 07            |                        | 00  | 0   | 0             |                                     |
| 08            | ID Manufacturer Name   | 09  | 9   | BOE           | ID = BOE                            |
| 09            |                        | E5  | 229 |               |                                     |
| 0A            | ID Product Code        | A4  | 164 | 1700          | ID = 1700                           |
| 0B            |                        | 06  | 6   |               |                                     |
| 0C            | 32-bit serial No.      | 00  | 0   |               |                                     |
| 0D            |                        | 00  | 0   |               |                                     |
| 0E            |                        | 00  | 0   |               |                                     |
| 0F            |                        | 00  | 0   |               |                                     |
| 10            | Week of manufacture    | 01  | 1   | 1             |                                     |
| 11            | Year of Manufacture    | 19  | 25  | 2015          | Manufactured in 2015                |
| 12            | EDID Structure Ver.    | 01  | 1   | 1             | EDID Ver 1.0                        |
| 13            | EDID revision #        | 04  | 4   | 4             | EDID Rev. 0.4                       |
| 14            | Video input definition | 95  | 149 | -             |                                     |
| 15            | Max H image size       | 22  | 34  | 34            | 34 cm (Approx)                      |
| 16            | Max V image size       | 13  | 19  | 19            | 19 cm (Approx)                      |
| 17            | Display Gamma          | 78  | 120 | 2.2           | Gamma curve = 2.2                   |
| 18            | Feature support        | 0A  | 10  |               | RGB display, Preferred Timming mode |
| 19            | Red/Green low bits     | 24  | 36  | -             | Red / Green Low Bits                |
| 1A            | Blue/White low bits    | 10  | 16  | -             | Blue / White Low Bits               |
| 1B            | Red x high bits        | 97  | 151 | 0.590         | Red (x) = 10010111 (0.59)           |
| 1C            | Red y high bits        | 59  | 89  | 0.350         | Red (y) = 01011001 (0.35)           |
| 1D            | Green x high bits      | 54  | 84  | 0.330         | Green (x) = 01010100 (0.33)         |
| 1E            | Green y high bits      | 8E  | 142 | 0.555         | Green (y) = 10001110 (0.555)        |
| 1F            | Blue x high bits       | 27  | 39  | 0.153         | Blue (x) = 00100111 (0.153)         |
| 20            | BLue y high bits       | 1E  | 30  | 0.119         | Blue (y) = 00011110 (0.119)         |
| 21            | White x high bits      | 50  | 80  | 0.313         | White (x) = 01010000 (0.313)        |
| 22            | White y high bits      | 54  | 84  | 0.329         | White (y) = 01010100 (0.329)        |
| 23            | Established timing 1   | 00  | 0   | -             |                                     |
| 24            | Established timing 2   | 00  | 0   | -             |                                     |

|    |                                              |    |     |      |                                                     |
|----|----------------------------------------------|----|-----|------|-----------------------------------------------------|
| 25 | Established timing<br>3                      | 00 | 0   | -    |                                                     |
| 26 | Standard timing #1                           | 01 | 1   |      | Not Used                                            |
| 27 |                                              | 01 | 1   |      |                                                     |
| 28 | Standard timing #2                           | 01 | 1   |      | Not Used                                            |
| 29 |                                              | 01 | 1   |      |                                                     |
| 2A | Standard timing #3                           | 01 | 1   |      | Not Used                                            |
| 2B |                                              | 01 | 1   |      |                                                     |
| 2C | Standard timing #4                           | 01 | 1   |      | Not Used                                            |
| 2D |                                              | 01 | 1   |      |                                                     |
| 2E | Standard timing #5                           | 01 | 1   |      | Not Used                                            |
| 2F |                                              | 01 | 1   |      |                                                     |
| 30 | Standard timing #6                           | 01 | 1   |      | Not Used                                            |
| 31 |                                              | 01 | 1   |      |                                                     |
| 32 | Standard timing #7                           | 01 | 1   |      | Not Used                                            |
| 33 |                                              | 01 | 1   |      |                                                     |
| 34 | Standard timing #8                           | 01 | 1   |      | Not Used                                            |
| 35 |                                              | 01 | 1   |      |                                                     |
| 36 | Detailed timing/mo<br>nitor<br>descriptor #1 | C8 | 200 | 71.1 | 71.12MHz Main clock                                 |
| 37 |                                              | 1B | 27  |      |                                                     |
| 38 |                                              | 56 | 86  | 1366 | Hor Active = 1366                                   |
| 39 |                                              | 65 | 101 | 101  | Hor Blanking = 101                                  |
| 3A |                                              | 50 | 80  | -    | 4 bits of Hor. Active + 4 bits of Hor. Blanking     |
| 3B |                                              | 00 | 0   | 768  | Ver Active = 768                                    |
| 3C |                                              | 28 | 40  | 40   | Ver Blanking = 40                                   |
| 3D |                                              | 30 | 48  | -    | 4 bits of Ver. Active + 4 bits of Ver. Blanking     |
| 3E |                                              | 30 | 48  | 48   | Hor Sync Offset = 48                                |
| 3F |                                              | 20 | 32  | 32   | H Sync Pulse Width = 32                             |
| 40 |                                              | 44 | 68  | 4    | V sync Offset = 4 line                              |
| 41 |                                              | 00 | 0   | 4    | V Sync Pulse width : 4 line                         |
| 42 |                                              | 58 | 88  | 344  | Horizontal Image Size = 344 mm (Low 8 bits)         |
| 43 |                                              | C2 | 194 | 194  | Vertical Image Size = 194 mm (Low 8 bits)           |
| 44 |                                              | 10 | 16  | -    | 4 bits of Hor Image Size + 4 bits of Ver Image Size |
| 45 |                                              | 00 | 0   | 0    | Hor Border (pixels)                                 |
| 46 |                                              | 00 | 0   | 0    | Vertical Border (Lines)                             |
| 47 |                                              | 1A | 26  |      | Refer to right table                                |

|              |                                       |                                           |     |                                                                                        |                                                     |            |
|--------------|---------------------------------------|-------------------------------------------|-----|----------------------------------------------------------------------------------------|-----------------------------------------------------|------------|
| BOE          |                                       | PRODUCT GROUP                             |     |                                                                                        | REV                                                 | ISSUE DATE |
|              |                                       | Customer SPEC                             |     |                                                                                        | Rev. O                                              | 2016.03.16 |
| 48           | Detailed timing/monitor descriptor #2 | 84                                        | 132 | 60.2                                                                                   | 60.2MHz Main clock                                  |            |
| 49           |                                       | 17                                        | 23  |                                                                                        |                                                     |            |
| 4A           |                                       | 56                                        | 86  | 1366                                                                                   | Hor Active = 1366                                   |            |
| 4B           |                                       | 80                                        | 128 | 384                                                                                    | Hor Blanking = 384                                  |            |
| 4C           |                                       | 51                                        | 81  | -                                                                                      | 4 bits of Hor. Active + 4 bits of Hor. Blanking     |            |
| 4D           |                                       | 00                                        | 0   | 768                                                                                    | Ver Active = 768                                    |            |
| 4E           |                                       | 5C                                        | 92  | 92                                                                                     | Ver Blanking = 92                                   |            |
| 4F           |                                       | 30                                        | 48  | -                                                                                      | 4 bits of Ver. Active + 4 bits of Ver. Blanking     |            |
| 50           |                                       | 64                                        | 100 | 100                                                                                    | Hor Sync Offset = 100                               |            |
| 51           |                                       | 64                                        | 100 | 100                                                                                    | H Sync Pulse Width = 100                            |            |
| 52           |                                       | 44                                        | 68  | 20                                                                                     | V sync Offset = 20 line                             |            |
| 53           |                                       | 05                                        | 5   | 20                                                                                     | V Sync Pulse width : 20 line                        |            |
| 54           |                                       | 58                                        | 88  | 344                                                                                    | Horizontal Image Size = 344 mm (Low 8 bits)         |            |
| 55           |                                       | C2                                        | 194 | 194                                                                                    | Vertical Image Size = 194 mm (Low 8 bits)           |            |
| 56           |                                       | 10                                        | 16  | -                                                                                      | 4 bits of Hor Image Size + 4 bits of Ver Image Size |            |
| 57           |                                       | 00                                        | 0   | 0                                                                                      | Hor Border (pixels)                                 |            |
| 58           |                                       | 00                                        | 0   | 0                                                                                      | Vertical Border (Lines)                             |            |
| 59           |                                       | 1A                                        | 26  |                                                                                        |                                                     |            |
| 5A           | Detailed timing/monitor descriptor #3 | 00                                        | 0   | Nvidia nvDPS<br>Lowest refresh rate that does not cause any visual/optical side effect |                                                     |            |
| 5B           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 5C           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 5D           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 5E           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 5F           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 60           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 61           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 62           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 63           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 64           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 65           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 66           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 67           |                                       | 00                                        | 0   |                                                                                        |                                                     |            |
| 68           | 00                                    | 0                                         |     |                                                                                        |                                                     |            |
| 69           | 00                                    | 0                                         |     |                                                                                        |                                                     |            |
| 6A           | 00                                    | 0                                         |     |                                                                                        |                                                     |            |
| 6B           | 00                                    | 0                                         |     |                                                                                        |                                                     |            |
| SPEC. NUMBER |                                       | SPEC. TITLE                               |     |                                                                                        |                                                     | PAGE       |
| S871-C017    |                                       | NT156WHM-N32 Product Specification Rev. O |     |                                                                                        |                                                     | 32 OF 33   |

|            |               |        |            |
|------------|---------------|--------|------------|
| <b>BOE</b> | PRODUCT GROUP | REV    | ISSUE DATE |
|            | Customer SPEC | Rev. O | 2016.03.16 |

|    |                                              |    |     |   |                                                   |
|----|----------------------------------------------|----|-----|---|---------------------------------------------------|
| 6C | Detailed timing/mo<br>nitor<br>descriptor #4 | 00 | 0   | 0 | Detailed Timing Description #4                    |
| 6D |                                              | 00 | 0   | 0 | Flag                                              |
| 6E |                                              | 00 | 0   | 0 | Reserved                                          |
| 6F |                                              | 02 | 2   |   | For Brightness Table and Power consumption        |
| 70 |                                              | 00 | 0   | 0 | Flag                                              |
| 71 |                                              | 0C | 12  |   | PWM % [7:0] @ Step 0                              |
| 72 |                                              | 3D | 61  |   | PWM % [7:0] @ Step 5                              |
| 73 |                                              | E3 | 227 |   | PWM % [7:0] @ Step 10                             |
| 74 |                                              | 0D | 13  |   | Nits [7:0] @ Step 0                               |
| 75 |                                              | 3C | 60  |   | Nits [7:0] @ Step 5                               |
| 76 |                                              | 6E | 110 |   | Nits [7:0] @ Step 10                              |
| 77 |                                              | 0D | 13  |   | Panel Electronics Power @32x32 Chess Pattern<br>= |
| 78 |                                              | 0E | 14  |   | Backlight Power @60 nits=                         |
| 79 |                                              | 19 | 25  |   | Backlight Power @Step 10=                         |
| 7A |                                              | 73 | 115 |   | Nits @ 100% PWM Duty =                            |
| 7B |                                              | 00 | 0   | 0 | Flags                                             |
| 7C |                                              | 00 | 0   | 0 | Flags                                             |
| 7D |                                              | 00 | 0   | 0 | Flags                                             |
| 7E | Extension flag                               | 00 | 0   |   |                                                   |
| 7F | Checksum                                     | B7 | 183 | - |                                                   |

|                           |                                                          |                  |
|---------------------------|----------------------------------------------------------|------------------|
| SPEC. NUMBER<br>S871-C017 | SPEC. TITLE<br>NT156WHM-N32 Product Specification Rev. O | PAGE<br>33 OF 33 |
|---------------------------|----------------------------------------------------------|------------------|